abitana

High performance power supply

4-plug output cord to power 4 Smart Media module

Easy mounting with bracket, does not consume DIN-rail space



5VDC-4A power supply with a daisy-chain 4-plug output power cord. The cord length between succesive plugs is approximately 40cm, in order to be able to reach modules situated far away from each other in a cabinet. The power supply has a male IEC C14 mains input and comes with a IEC C13 to EURO (pin earth) cord. The power supply can easily be mounted in the cabinet by sliding the included mounting bracket into the suited slot at the bottom the abitana DIN-rail connectors.

CHARACTERISTICS Complies with:

UL, CSA, CE, TüV

EN5022 Class B, Emission

EN55022, EN550024, Safety

IEC61000-4-2, IEC61000-4-3, Safety

IEC61000-4-4, IEC61000-4-5, Safety


Applicable directives : 89/336/EEC; 92/31/EEC; 73/23/EEC

- Switchmode power supply
- Input 100-240VAC, max 1000mA, 50/60Hz
- Output 5VDC, max 4000mA
- Output by 4 connectors in daisy chain
- Supplied with mounting bracket, mains lead
- WxHxD (mm): 90x32x46
- Net weight: 365g

Required for:

- ABI-EV2012S00
- ABI-EV1012S00
- ABI-EV1001S00
- ABI-EV1017S00
- ABI-EL1001S00
- ABI-EL2002S00
- ADI-EL2002300

BLOCK DIAGRAM

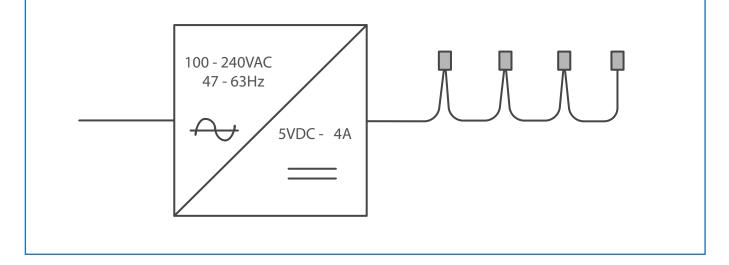

Specifications are subject to change without notice.